


ASSEMBLY INSTRUCTIONS

SM667203W

Page 1

Components:


Panels:



(2) Floor Panels
(open hole sockets)



(1) 1st Level
(closed hole sockets)




(2) 2nd and 3rd Levels
(open center
hole sockets)

Legs:

(12) - 12"
(3) - 24"
(3) - 36"
(6) - 72"



Oil All Sockets Before Assembly

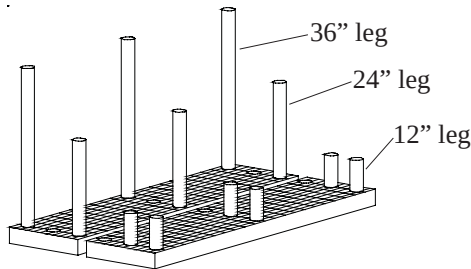

Step 1 Floor Level

Place legs as shown.
Push legs through to ground.


Fully Assembled

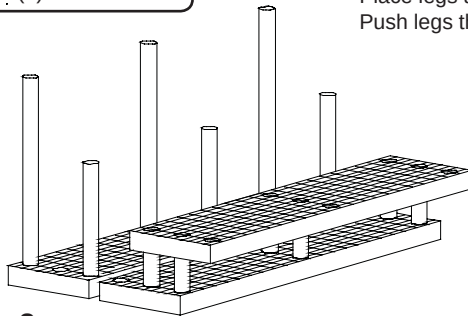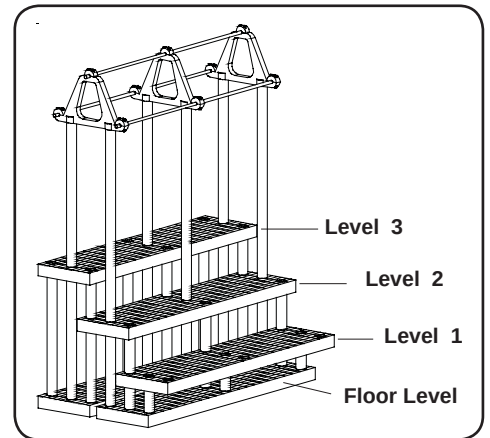

Step 2



Level 1

Position the Level 1 Panel on 12" legs
overhanging outside edge as shown.

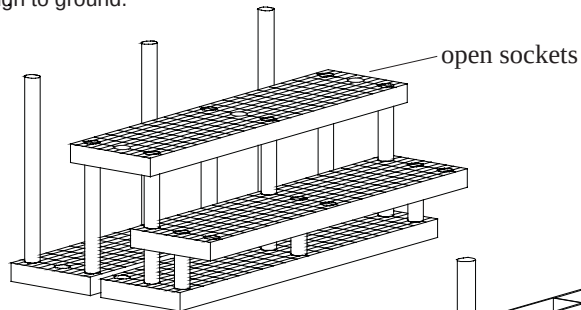

Step 3 Level 2

- Invert Level 2 panel and place
(4) 12" legs in outside sockets.
- Position panel on 24" legs
while placing 12" legs on the Level 1 panel.
Push panel down so that the 24" legs are
seated in the sockets.

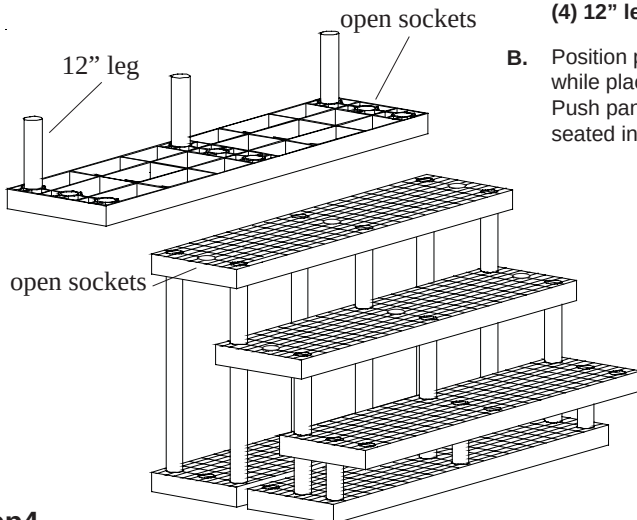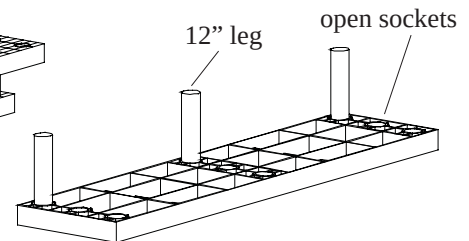

72" leg


Step 4 Level 3

- Invert Level 3 panel and place
(4) 12" legs in outside corners.
- Position panel on 36" legs while placing 12"
legs on the Level 2 panel. Push panel down so
that the 36" legs are seated in the sockets.

Oiling the sockets will
make this step easier.

Step 5 Plant Hanger

Insert 72" legs into center open hole
sockets of Levels 3 and 2. Slide legs all
the way through open hole sockets in floor
panels. (Make sure to push legs all the
way down to the floor).

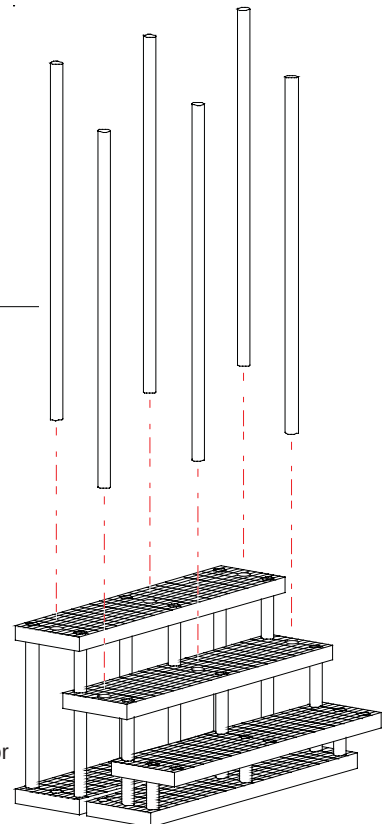

ASSEMBLY INSTRUCTIONS


SM667203W

Page 2

Oil All Sockets
Before Assembly

Components:


Plant Hanger Tops: 3
Plant Hanger Collars: 9
Plant Hanger Poles: 3
Bolts: 18
Wingnuts: 18

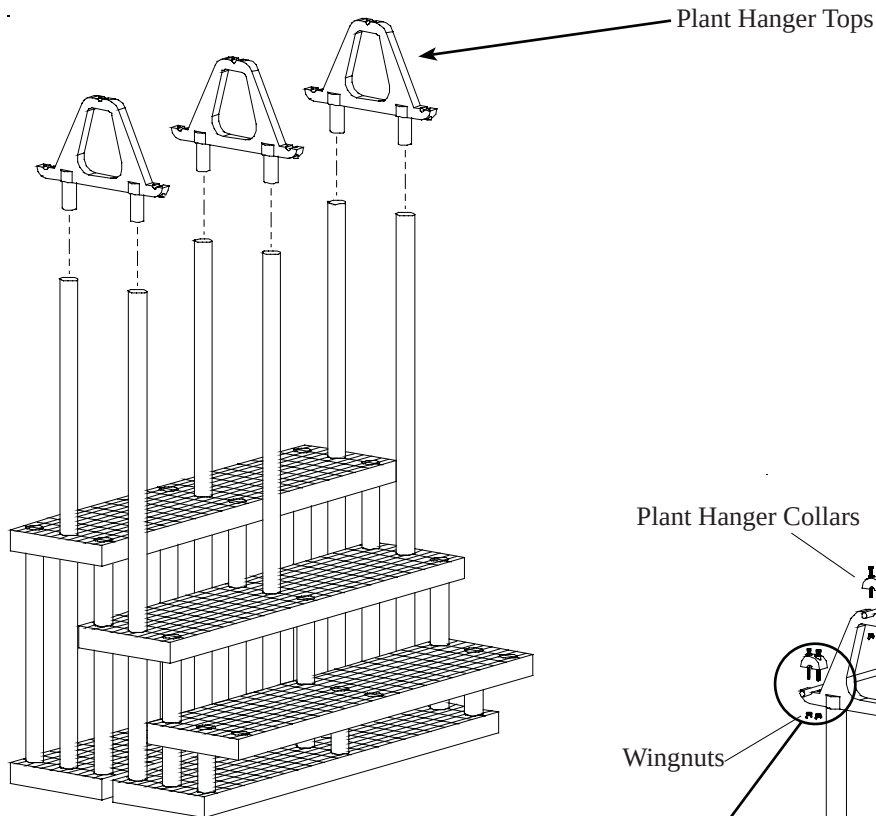


Step 6

Plant Hanger

Insert Plant hanger tops in 72" legs as shown.



Groove for
Plant Hanger
Poles

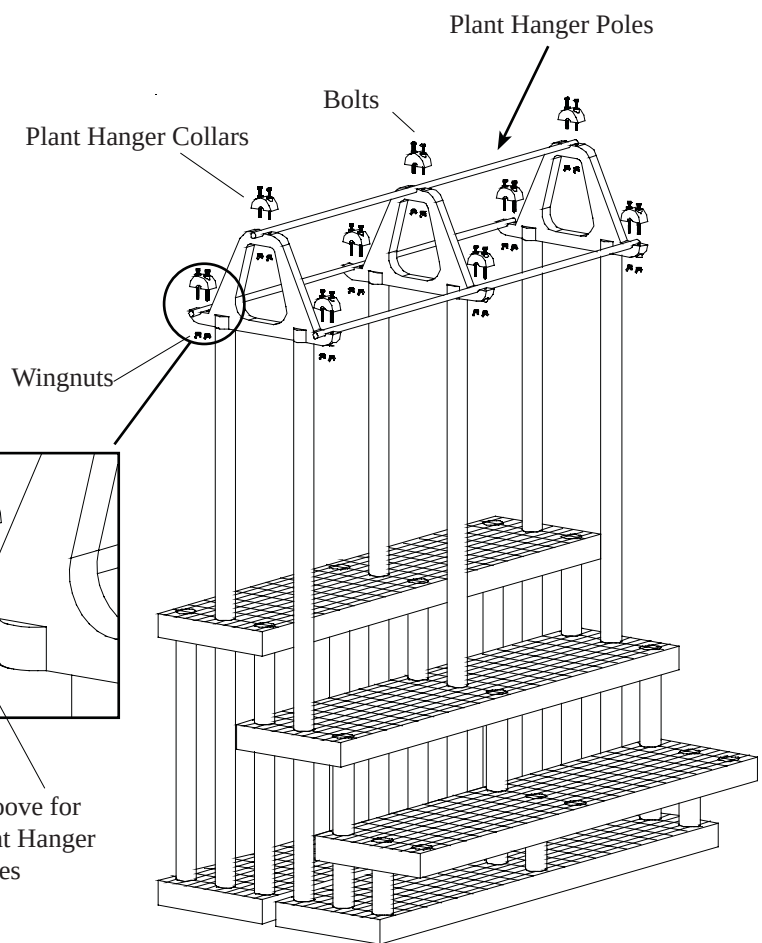

Step 7

Plant Hanger

Next, place 63" plant hanger poles into small groove in plant hanger top. Place plant hanger collars over poles and fasten down with bolts and wingnuts.